



(19) Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 213 919 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.06.2002 Bulletin 2002/24

(51) Int Cl. 7: H04N 5/445

(21) Application number: 01205003.5

(22) Date of filing: 16.07.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

• Thomas, William L.
Bixby, OK 74008 (US)
• Lemmons, Thomas R.
Sand Springs, OK 74063 (US)

(30) Priority: 17.07.1998 US 93292 P

(74) Representative: Hale, Peter et al
Kilburn & Strode
20 Red Lion Street
London WC1R 4PJ (GB)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
99935596.9 / 1 099 339

Remarks:

This application was filed on 19 - 12 - 2001 as a
divisional application to the application mentioned
under INID code 62.

(71) Applicant: United Video Properties, Inc.
Tulsa, OK 74136 (US)

(72) Inventors:
• Ellis, Michael D.
Boulder, CO 80304 (US)

(54) Interactive television program guide system having multiple devices within a household

(57) An interactive television program guide system based on multiple user television equipment devices in a single household is provided. The system provides a user with an opportunity to adjust program guide settings with a given one of the interactive television program guides. The system co-ordinates the operation of the interactive television program guides so that the program guide settings that were adjusted with the given interactive television program guide are used by the other interactive television program guides. Program guide settings include features related to setting program reminders, profiles, program recording features, messaging features, favorite features, parental control features, program guide set up features, (e.g. audio and video and language settings), etc. The operation of application such as web browser applications, home shopping applications, home banking applications, game applications, etc. may also be co-ordinated.

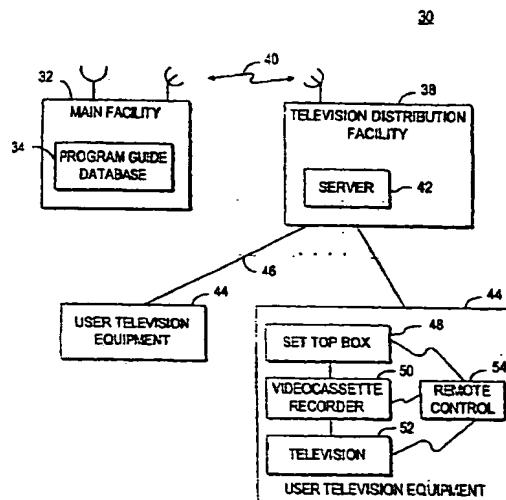


FIG. 1

EP 1 213 919 A2

BEST AVAILABLE COPY



(19) Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 213 919 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.06.2002 Bulletin 2002/24

(51) Int Cl.⁷: H04N 5/445

(21) Application number: 01205003.5

(22) Date of filing: 16.07.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

(30) Priority: 17.07.1998 US 93292 P

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
99935596.9 / 1 099 339

(71) Applicant: United Video Properties, Inc.
Tulsa, OK 74136 (US)

(72) Inventors:

• Ellis, Michael D.
Boulder, CO 80304 (US)

• Thomas, William L.
Bixby, OK 74008 (US)
• Lemmons, Thomas R.
Sand Springs, OK 74063 (US)

(74) Representative: Hale, Peter et al
Kilburn & Strode
20 Red Lion Street
London WC1R 4PJ (GB)

Remarks:

This application was filed on 19 - 12 - 2001 as a
divisional application to the application mentioned
under INID code 62.

(54) Interactive television program guide system having multiple devices within a household

(57) An interactive television program guide system based on multiple user television equipment devices in a single household is provided. The system provides a user with an opportunity to adjust program guide settings with a given one of the interactive television program guides. The system co-ordinates the operation of the interactive television program guides so that the program guide settings that were adjusted with the given interactive television program guide are used by the other interactive television program guides. Program guide settings include features related to setting program reminders, profiles, program recording features, messaging features, favorite features, parental control features, program guide set up features, (e.g. audio and video and language settings), etc. The operation of application such as web browser applications, home shopping applications, home banking applications, game applications, etc. may also be co-ordinated.

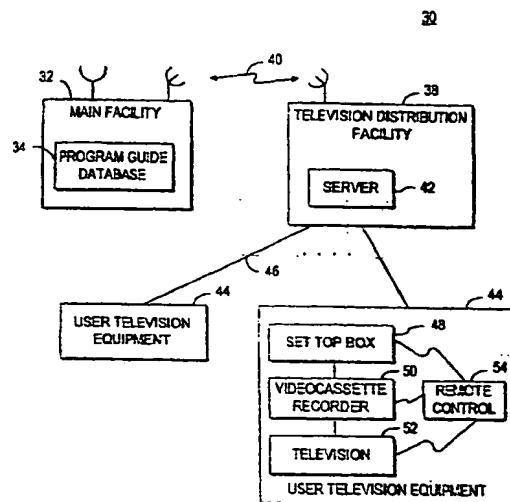


FIG. 1

[0010] Each piece of user television equipment may be located in a different part of the home. For example, one piece of equipment may be located in the parents' bedroom. Another piece of equipment may be located in a child's bedroom. Additional pieces of equipment may be located in a family room, kitchen, living room, etc.

[0011] Typical program guide features that may be provided by the program guides of this invention implemented on the user television equipment include features related to setting program reminders, profiles, program recording features, messaging features, favorites features, parental control features, program guide set up features (e.g., video display settings, language settings, etc.), and other suitable program guide features. The system coordinates operation of the program guides so that, for example, a user may adjust his favorite channel settings on a program guide operating in the living room and those settings will be effective on the program guide operating in the master bedroom and may therefore be used by that program guide.

[0012] A parent may adjust parental control settings using the program guide in the parents' room and the system may apply those settings to all program guides in the household. Parents may use the parental control feature to control the viewing of their children even though the children may be viewing television using multiple user television equipment devices. For example, parents may establish parental controls to lock various programs and services from a master location and the system will apply these parental controls to the various pieces of user television equipment throughout the household. The ability to establish favorite channels, to set reminders, and to control other program guide settings at one location and to have those settings applied to multiple locations throughout the household may be used by both the parents and their children.

[0013] A user may adjust his favorite settings on a program guide in the family room and may direct the system to apply those settings to the program guides in the family room and the living room. A child may set reminders for certain programs using the program guide in the family room and may direct the system to apply those settings only to the program guide running in that child's bedroom. A user may select a program for recording using a program guide in the living room and may request that the videocassette recorder in the family room be used to record the selected program. A user may receive messages from a cable system operator and may direct the system to make certain types of those messages available to the program guide located in all rooms but the children's room. A user may adjust language or audio settings using one program guide and have those settings apply globally.

[0014] As these examples serve to illustrate, the settings for any suitable program guide features may be adjusted using the program guide at one location in a household and applied by the system to selected other

program guides in the household.

[0015] The program guides may be linked using any suitable topologies and communication protocols. For example, the various pieces of user television equipment may be interconnected using a tree, bus or ring topology. One piece of user television equipment may be designated as a primary device and other pieces of user television equipment may be designated as secondary devices. The primary and secondary devices may be connected in a star arrangement. A remote server may be used to implement certain program guide features and the pieces of user television equipment in the home may act as clients.

[0016] If desired, non-program-guide applications may be implemented on the user television equipment. Such non-program-guide applications may include, for example, a web browser application, a home shopping application, a game application, an e-mail application, a chat application, a banking application, etc. These applications may be implemented on a set-top box within the user television equipment. The user may adjust the settings of such a non-program-guide application at one set-top box. The system coordinates the operation of the various set-top boxes so that the adjusted settings may be used by similar applications running on other set-top boxes in the household.

[0017] According to an embodiment there is provided an interactive television program guide system comprising:

30 a plurality of user television equipment devices interconnected by communications paths and located in a household and on at least two of which devices interactive television program guides are implemented;
 35 means associated with at least one of said interactive television program guides for adjusting interactive television program guide settings; and
 40 means for coordinating the operation of said interactive television program guides so that the program guide settings that are adjusted using said means for adjusting are effective on at least one of the interactive television program guides other than the interactive television program guide implemented on the television equipment device with which the means for adjusting is associated.

[0018] Preferably, the interactive television program guide system further comprises means for selecting the interactive television program guides on which the adjusted program guide settings will be effective; and/or
 50 wherein said means for selecting uses input from a user; and/or
 wherein said means for selecting uses a default location; and/or
 55 wherein said means for selecting uses other factors to determine the location.
 [0019] Preferably, at least one of the user television

equipment devices comprises a set-top box; and/or

the means for adjusting permits adjusting parental control settings; and/or

the means for adjusting permits adjusting favorites; and/or

the means for adjusting permits adjusting profiles; and/or

the means for adjusting permits adjusting set recording settings; and/or

the means for adjusting permits adjusting pay-per view settings; and/or

the means for adjusting permits adjusting messages settings; and/or

the means for adjusting permits adjusting set up settings.

[0020] Preferably, one of the user television equipment devices is a primary user television equipment device and the other user television equipment devices are secondary user television equipment devices; and/or

the communications paths are configured to connect each one of the secondary user television equipment devices to the primary user television equipment device.

[0021] Preferably, the communications paths are configured to connect the user television equipment devices in a tree topology; and/or

the communications paths are configured to connect the user television equipment devices in a ring topology; and/or

the communications paths are configured to connect the user television equipment devices in a bus topology; and/or

the household comprises a home, the system further comprises a server in the household to which each of the user television equipment devices is connected in a client-server interactive television program guide configuration; and/or

one of the user television equipment devices comprises a set-top box and at least a television and other user television equipment devices in the household comprise a television but not a set-top box, each of the user television equipment devices being interconnected with the set-top box; and/or

the household comprises one home among a plurality of homes, the system further comprising a server located outside the plurality of homes, the server being configured to provide interactive television program guide functions to the homes; and/or

the household comprises first and second homes, wherein one of the user television equipment devices is located in the first home and one other one of the user television equipment devices is located in the second home, the giving interactive television program guide being implemented on the user television equipment devices that is located in the first home and another one of the interactive television program guides being implemented on the other one of the user television equipment devices that is located in the second home.

[0022] Preferably, the interactive television program guide system further comprises means for providing an assign location screen to the user.

[0023] Preferably, the household comprises a home with multiple rooms at least two of which each contain one of the user television equipment devices on which one of the interactive television program guides is implemented, the system further comprising means for selecting the interactive television program guides on which the adjusted program guide settings are to be effective by selecting certain rooms.

[0024] Preferably, the interactive television program guide system further comprises means for allowing the user to monitor the television viewing of users at interactive television program guides other than the interactive television program guide on the user television equipment with which the means for adjusting is associated; and/or

the means for adjusting permits adjusting maximum rating allowed settings; and/or

the means for adjusting permits adjusting pay per view settings;

further comprising means for displaying information to the user on the interactive television program guide on the user television equipment device associated with the means for adjusting is implemented regarding a cost associated with each extra program guide location within the household that is authorized to view the pay-per-view television program purchased by the user.

[0025] Preferably, the interactive television program guide system defined further comprises

means for sending messages to viewers at interactive television program guides other than the interactive television program guide on the user television equipment with which the means for adjusting is associated; and/or

wherein the means for adjusting permits adjusting the channel setting at a remote location; and/or the interactive television program guide system further comprises means for disallowing monitoring of a selected location.

[0026] According to a further embodiment, there is provided an interactive television program guide system comprising

a plurality of user television equipment devices interconnected by communications paths and located in a household and on at least two of which devices interactive television program guides are implemented:
 at least one of said interactive television program guides configured to adjust interactive television program guide settings; and
 at least one of said interactive television program guides configured to coordinate the operation of said interactive television program guides so that program guide settings adjusted by at least one of one of said guides configured to adjust program settings are effective on at least one of the interactive television program guides other than the interactive television program guide implemented on the television equipment device configured to adjust program guide settings.

[0027] Preferably, at least one of said guides is configured to allow the selection of the interactive television program guides on which the adjusted program guide settings will be effective; and preferably the

settings are effective on an interactive television program guide selected by a user.

[0028] Preferably, the settings are effective on an interactive television program guide selected by default; and/or the settings are effective on an interactive television program guides selected based on other factors.

[0029] Preferably, at least one of the user television equipment devices comprises a set-top box.

[0030] Preferably, the settings adjusted include parental control settings; and/or

the settings adjusted include favorites; and/or

the settings adjusted include set recording settings; and/or

the settings adjusted include pay-per-view settings; and/or

the settings adjusted include message setting; and/or

the settings adjusted include set up settings.

[0031] Preferably, one of the user television equipment devices is a primary user television equipment device and the other user television equipment devices are secondary user television equipment devices.

[0032] Preferably the communications paths are configured to connect each one of the secondary user television equipment devices to the primary user television equipment device; and/or

10 the communications paths are configured to connect the user television equipment devices in a tree topology; and/or

15 the communications paths are configured to connect the user television equipment devices in a ring topology; and/or

20 the communications paths are configured to connect the user television equipment devices in a bus topology; and/or

25 the household comprises a home, the system further comprises a server in the household to which each of the user television equipment devices is connected in a client-server interactive television program guide configuration; and/or

30 one of the user television equipment devices comprises a set-top box and at least a television and other user television equipment devices in the household comprise a television but not a set-top box, each of the user television equipment devices being interconnected with the set-top box.

35 [0033] Preferably the household comprises one home among a plurality of homes, the system further comprising a server located outside the plurality of homes, the server being configured to provide interactive television program guide functions to the homes; and/or

40 the household comprises first and second homes, wherein one of the user television equipment devices is located in the first home and one other one of the user television equipment devices is located in the second home, the giving interactive television program guide being implemented on the user television equipment devices that is located in the first home and another one of the interactive television program guides being implemented on the other one of the user television equipment devices that is located in the second home; and/or the interactive television program guide system further comprises an assign location screen.

45 55 [0034] Preferably, the household comprises a home with multiple rooms at least two of which each contain one of the user television equipment devices on which one of the interactive television program guides is im-

plemented, the system further comprising at least one of said interactive television program guides configured to select the interactive television program guides on which the adjusted program guide settings are to be effective by selecting certain rooms.

[0035] Preferably, the interactive television program guide system further comprises at least one of said interactive television program guides configured to allow the user to monitor the television viewing of users at interactive television program guides other than the interactive television program guide configured to allow the user to monitor the television viewing of users; and/or

the settings adjusted include maximum rating allowed settings; and/or

the settings adjusted include pay-per-view settings; and the system further comprises at least one of said interactive television program guides configured to display information to the user on the user television equipment device on which the interactive television program guide configured to adjust settings is implemented regarding a cost associated with each extra program guide location within the household that is authorized to view the pay-per-view television program purchased by the user; and/or the interactive television program guide system further comprises

at least one of said interactive television program guides configured to send messages to viewers at interactive television program guides other than the interactive television program guide configured to adjust settings is implemented; and/or

the settings adjusted include the channel setting.

[0036] Preferably, the interactive television program guide system further comprises

at least one of said interactive television program guides configured to disallow the ability to monitor the television viewing of users at specified interactive television program guides other than the interactive television program guide configured to allow the user to monitor the television viewing of users.

[0037] According to yet another embodiment, there is provided a method for using an interactive television program guide system in which a plurality of user television equipment devices interconnected by communications paths and located in a household and on at least two of which devices interactive television program guides are implemented;

adjusting interactive television program guide settings with at least one of the interactive television program guides; and
coordinating the operation of said interactive television

program guides so that program guide settings adjusted by at least one of one of said interactive television program guides are effective on at least one of the interactive television program guides other than the interactive television program guide implemented on the television equipment device used to adjust program guide settings.

[0038] Preferably the method further comprises selecting the interactive television program guides on which the adjusted program guide settings will be effective; and/or

15 a user selects the interactive television program guides on which the adjusted program guide settings will be effective; and/or

20 selects the interactive television program guides on which the adjusted program guide settings will be effective; and/or

25 other factors are used to select the interactive television program guides on which the adjusted program guide settings will be effective; and/or

at least one of the user television equipment devices comprises

30 a set-top box; and/or

the settings adjusted include parental control settings; and/or

35 the settings adjusted include favorites; and/or

the settings adjusted include set recording settings; and/or

40 the settings adjusted include pay-per-view settings; and/or

45 the settings adjusted include message settings; and/or

the settings adjusted include set up settings.

[0039] Preferably one of the user television equipment devices is a primary user television equipment device and the other user television equipment devices are secondary user television equipment devices; and/or the

50 communications paths are configured to connect each one of the secondary user television equipment devices to the primary user television equipment device; and/or the

55 communications paths are configured to connect

the user television equipment devices in a tree topology; and/or the

communications paths are configured to connect the user television equipment devices in a ring topology; and/or the

communications paths are configured to connect the user television equipment devices in a bus topology.

[0040] Preferably, the household comprises a home, the system further comprises a server in the household to which each of the user television equipment devices is connected in a client-server interactive television program guide configuration; and/or one of

the user television equipment devices comprises a set-top box and at least a television and other user television equipment devices in the household comprise a television but not a set-top box, each of the user television equipment devices being interconnected with the set-top box; and/or the

household comprises one home among a plurality of homes, the system further comprising a server located outside the plurality of homes, the server being configured to provide interactive television program guide functions to the homes; and/or the

household comprises first and second homes, wherein one of the user television equipment devices is located in the first home and one other one of the user television equipment devices is located in the second home, the giving interactive television program guide being implemented on the user television equipment devices that is located in the first home and another one of the interactive television program guides being implemented on the other one of the user television equipment devices that is located in the second home.

[0041] Preferably the method further comprises viewing an assign location screen.

[0042] Preferably, the household comprises a home with multiple rooms at least two of which each contain one of the user television equipment devices on which one of the interactive television program guides is implemented, the method further comprising selecting the interactive television program guides on which the adjusted program guide settings are to be effective by selecting certain rooms; and/or the method further comprises monitoring the television viewing of users at interactive television program guides other than the interactive television program guide on the user television equipment used to adjust settings; and/or the

settings adjusted include maximum rating allowed settings; and/or the

settings adjusted include pay-per-view settings; and the method further comprises display information to the user on the user television equipment device on which the interactive television program guide used to adjust settings is implemented regarding a cost associated with each extra program guide location within the household that is authorized to view the pay-per-view television program purchased by the user; and/or

the method further comprises

sending messages to viewers at interactive television program guides other than the interactive television program guide on the user television equipment used to adjust settings; and/or

the method further comprises adjusting the channel setting at a remote location; and/or

the method further comprises disallowing monitoring of a selected location.

[0043] According to another embodiment, there is provided a system comprising

a plurality of user television equipment devices interconnected by communications paths and located in a household, wherein the user television equipment devices include set-top boxes and wherein an application is implemented on each set-top box; means for providing an opportunity for a user to adjust settings associated with a given one of the applications implemented on a given one of the set-top boxes; and

means for coordinating the operation of the applications so that the settings of the given application implemented on the given set-top box that are adjusted are used by at least one of the other applications implemented on another one of the set-top boxes.

[0044] According to another embodiment, there is provided a system comprising

a plurality of user television equipment devices interconnected by communications paths and located in a household, wherein the user television equipment devices include set-top boxes, wherein an application is implemented on each set-top box, and wherein the user television equipment devices are configured to allow a user to adjust settings associated with a given one of the applications implemented on a given one of the set-top boxes, and are con-

figured to coordinate the operation of the applications so that the settings of the given application implemented on the given set-top box that are adjusted are used by at least one of the other applications implemented on another one of the set-top boxes.

[0045] According to yet another embodiment, there is provided a

method for using a system in which a plurality of user television equipment devices are interconnected by communications paths located in a household, wherein the user television equipment devices include set-top boxes, and wherein an application is implemented on each set-top box, comprising:

providing an opportunity for a user to adjust settings associated with a given one of the applications implemented on a given one of the set-top boxes; and

coordinating the operation of the applications so that the settings of the given application implemented on the given one of the set-top boxes that are adjusted are used by at least one of the other applications on another one of the set-top boxes.

[0046] According to one embodiment, there is provided an interactive television program guide system based on multiple user television equipment devices in a single household, comprising:

a plurality of user television equipment devices interconnected by communications paths and located in a single household and on which a plurality of interactive television program guides are implemented;

means for providing an opportunity for a user at a given one of the plurality of interactive television program guides to adjust program guide settings with the one of said plurality of interactive television program guides; and

means for coordinating the operation of the plurality of interactive television program guides so that the program guide settings that are adjusted with the given one of the plurality of interactive television program guides are used by at least another one of the plurality of interactive television program guides during operation of the plurality of interactive program guides.

[0047] According to another embodiment, there is provided an interactive television program guide system based on multiple user television equipment devices in a single household, comprising:

a plurality of user television equipment devices interconnected by communications paths and located

in a single household and on which a plurality of interactive television program guides are implemented, wherein the plurality of user television equipment devices are configured to:

provide an opportunity for a user to adjust program guide settings with a given one of the plurality of interactive television program guides; and

coordinate the operation of the plurality of interactive television program guides so that the program guide settings that are adjusted with the given one of the plurality of interactive television program guides are used by at least another one of the plurality of interactive television program guides during operation of the plurality of interactive program guides.

[0048] According to another embodiment, there is provided a method for using an interactive television program guide system based on multiple user television equipment devices in a single household, wherein the system has a plurality of user television equipment devices on which interactive television program guides are implemented and wherein the user television equipment devices are interconnected by communications paths and located in a single household, comprising:

providing an opportunity for a user at a given one of the plurality of interactive television program guides to adjust program guide settings with that given one of the plurality of interactive television program guides; and

coordinating the operation of said plurality of interactive television program guides so that the program guide settings that are adjusted with the given one of the plurality of interactive television program guides are used by at least another one of the plurality of interactive television program guides during operation of the plurality of interactive program guides.

Brief Description of the Drawings

[0049]

FIG. 1 is a diagram of an interactive television program guide system in accordance with the present invention.

FIG. 2 is a flow chart of steps involved in adjusting user settings and applying those adjustments to desired locations in accordance with the present invention.

FIG. 3 is a diagram of a system in which multiple interactive television program guides are implemented in a star configuration accordance with the present invention.

FIG. 4a is a diagram of a system in which multiple

interactive television program guides are implemented in a tree configuration in accordance with the present invention.

FIG. 4b is a diagram of a system in which multiple interactive television program guides are implemented in a ring configuration in accordance with the present invention.

FIG. 4c is a diagram of a system in which multiple interactive television program guides are implemented in a bus configuration in accordance with the present invention.

FIG. 5 is a diagram of another system in which multiple interactive television program guides are implemented in a client-server configuration in accordance with the present invention.

FIG. 6 is a diagram of a system in which multiple interactive television program guides are implemented in a client-server configuration and in which the set-top-box acts as the server in accordance with the present invention.

FIG. 7a is a diagram of a system similar to the system of FIG. 1 in which multiple interactive television program guides are implemented in a neighborhood node configuration in accordance with the present invention.

FIG. 7b is a diagram of a system similar to the system of FIG. 1 showing how servers may be located at network nodes in accordance with the present invention.

FIG. 7c is a diagram of a system similar to the system of FIG. 1 showing how homes may be connected by modem links in accordance with the present invention.

FIG. 7d is a diagram of a system similar to the system of FIG. 1 showing how homes may be connected via a server in accordance with the present invention.

FIG. 8 is a diagram of a system in which multiple interactive television program guides are implemented and in which each such guide uses a real-time communications device connected to the Internet in accordance with the present invention.

FIG. 9 is a diagram of a system in which multiple interactive television program guides are implemented with an occasional return path communications device in accordance with the present invention.

FIG. 10 is a diagram of illustrative user television equipment with an optional data input device in accordance with the present invention.

FIG. 11 is a depiction of an illustrative location selection screen in accordance with the present invention.

FIG. 12 is a depiction of an illustrative main menu screen in accordance with the present invention.

FIG. 13 is a depiction of another illustrative location selection screen in accordance with the present invention.

FIG. 14 is a flow chart showing steps involved in an illustrative approach for selecting a location for which to adjust settings in accordance with the present invention.

FIG. 15 is a depiction of an illustrative parental control password screen and an illustrative corresponding parental control access denied screen in accordance with the present invention.

FIG. 16 is a diagram of an illustrative parental control screen in accordance with the present invention.

FIG. 17 is a flow chart showing steps involved in an illustrative approach for applying parental controls in accordance with the present invention.

FIG. 18a is a depiction of an illustrative parental controls set channels screen in which selected channels are blocked in accordance with the present invention.

FIG. 18b is a depiction of an illustrative parental controls set channels screen in which selected channels are hidden in accordance with the present invention.

FIG. 19 is a depiction of an illustrative monitor viewing screen in accordance with the present invention.

FIG. 20 is a depiction of an illustrative browse screen in accordance with the present invention.

FIG. 21 is a depiction of an illustrative set reminder screen in accordance with the present invention.

FIG. 22 is a depiction of an illustrative select reminder screen in accordance with the present invention.

FIG. 23 is a flow chart showing steps involved in an illustrative approach for setting and selecting a reminder in accordance with the present invention.

FIG. 24 is a depiction of an illustrative favorite channels screen in accordance with the present invention.

FIG. 25 is a depiction of an illustrative set recording screen in accordance with the present invention.

FIG. 26 is a depiction of an illustrative pay-per-view movies screen in accordance with the present invention.

FIG. 27 is a depiction of an illustrative pay-per-view select start time screen in accordance with the present invention.

FIG. 28 is a depiction of an illustrative messages receiving screen in accordance with the present invention.

FIG. 29 is a depiction of an illustrative messages sending (user entered) screen in accordance with the present invention.

FIG. 30 is a depiction of an illustrative messages sending (pre-set) screen in accordance with the present invention.

FIG. 31 is a depiction of an illustrative setup screen in accordance with the present invention.

FIG. 32 is a depiction of an illustrative setup language screen in accordance with the present invention.

5

10

15

20

25

30

35

40

45

50

55

FIG. 33 is a depiction of an illustrative setup audio screen in accordance with the present invention.

FIG. 34 is a depiction of an illustrative Internet browser screen in accordance with the present invention.

FIG. 35 is a depiction of an illustrative shopping data entry screen in accordance with the present invention.

FIG. 36 is a depiction of an illustrative stock ticker data entry screen in accordance with the present invention.

Detailed Description of the Preferred Embodiments

[0050] An illustrative program guide system 30 in accordance with the present invention is shown in FIG. 1. Main facility 32 contains a program guide database 34 for storing program guide information such as television program guide program listings data, pay-per-view ordering information, television program promotional information, etc. Information from database 34 may be transmitted to multiple television distribution facilities such as television distribution facility 38 via communications links such as communications link 40. Only one such television distribution facility 38 and one communications link 40 are shown in FIG. 1 to avoid over-complicating the drawings. Link 40 may be a satellite link, a telephone network link, a cable or fiber optic link, a microwave link, a combination of such links, or any other suitable communications path. If it is desired to transmit video signals (e.g., for advertising and promotional videos) over link 40 in addition to data signals, a relatively high bandwidth link such as a satellite link is generally preferable to a relatively low bandwidth link such as a telephone line.

[0051] Television distribution facility 38 is a facility for distributing television signals to users, such as a cable system headend, a broadcast distribution facility, or a satellite television distribution facility or the like.

[0052] The program guide information transmitted by main facility 32 to television distribution facility 38 includes television program listings data such as program times, channels, titles, descriptions, etc. Transmitted program guide information may also include pay program data such as pricing information for individual programs and subscription channels, time windows for ordering programs and channels, telephone numbers for placing orders that cannot be impulse ordered, etc. If desired, some of the program guide and advertising information may be provided using data sources at facilities other than main facility 32. For example, data related to pay program order processing (e.g., billing data and the like) may be generated by an order processing and billing system that is separate from main facility 32 and separate from television distribution facility 38. Similarly, advertising information may be generated by an advertising facility that is separate from main facility 32 and television distribution facility 38.

[0053] A server 42 may be provided in television distribution facility 38 for handling data distribution tasks and for storing local information. If desired, server 42 may be used to implement a client-server based interactive television program guide system. In such a system, client functions may be performed at user television equipment 44. Server 42 may be capable of handling text, graphics, and video.

[0054] Television distribution facility 38 distributes program guide and advertising information to the user television equipment 44 of multiple users via communications paths 46. Program guide data and other information may be distributed over an out-of-band channel on paths 46 or using any other suitable distribution technique.

[0055] Each user has a receiver, which is typically a set-top box such as set-top box 48, but which may be other suitable television equipment into which circuitry similar to set-top-box circuitry has been integrated. If desired, user television equipment 44 may be an advanced television receiver or a personal computer television (PC/TV). For purposes of illustration, the present invention will generally be described in connection with user television equipment based on a set-top box arrangement.

Program guide data may be distributed to set-top boxes 48 periodically and stored or may be distributed continuously and handled "on the fly", or by request. Television distribution facility 38 may poll set-top boxes 48 periodically for certain information (e.g., pay program account information or information regarding programs that have been purchased and viewed using locally-generated authorization techniques). Main facility 32 preferably contains a processor to handle information distribution tasks. Each set-top box 48 preferably contains a processor to handle tasks associated with implementing a program guide application on the set-top box 48. Television distribution facility 38 may contain a processor for tasks associated with implementing server 42 and for handling tasks associated with the distribution of program guide and other information.

[0056] Each set-top box 48 is may connected to an optional videocassette recorder 50 or other suitable recording device (e.g., digital storage device) so that selected television programs may be recorded. Each videocassette recorder 50 may be connected to a television 52. To record a program, set-top box 48 tunes to a particular channel and sends control signals to videocassette recorder 50 (e.g., using an infrared transmitter) that direct videocassette recorder 50 to start and stop recording at the appropriate times.

[0057] During use of the interactive television program guide implemented on set-top box 48, television program listings may be displayed on television 52. Each set-top box 48, videocassette recorder 50, and television 52 may be controlled by one or more remote controls 54 or any other suitable user input interface such as a wireless keyboard, mouse, trackball, dedicated set of buttons, etc.

[0058] Communications paths 46 preferably have sufficient bandwidth to allow television distribution facility 38 to distribute scheduled television programming, pay programming, advertising and other promotional videos, and other video information to set-top boxes 44 in addition to non-video program guide data. Multiple television and audio channels (analog, digital, or both analog and digital) may be provided to set-top boxes 48 via communications paths 46. If desired, program listings and other information may be distributed by one or more distribution facilities that are similar to but separate from television distribution facility 38 using communications paths that are separate from communications paths 46.

[0059] Certain functions such as pay program purchasing may require set-top boxes 48 to transmit data to television distribution facility 38 over communications paths 46. If desired, such data may be transmitted over telephone lines or other separate communications paths. If functions such as these are provided using facilities separate from television distribution facility 38, some of the communications involving set-top boxes 48 may be made directly with the separate facilities.

[0060] The present invention involves the distribution of user program guide settings to multiple program guide locations within a household. Such a household may contain multiple pieces of user television equipment. A program guide may be implemented on each piece of user television equipment. An illustrative process for distributing such settings is shown in FIG. 2. At step 500, a first program guide provides the user with an opportunity to adjust program guide settings (e.g., program guide settings for user profiles, favorites, parental controls, reminders, recording options, pay-per-view options, message options, or other setup functions). At step 510, the system coordinates the operation of the multiple interactive television program guides so that the program guide settings that were adjusted with the first interactive television program guide are effective on a second interactive television program guide and may be used by that second interactive television program guide.

[0061] The steps of FIG. 2 are preferably performed using program guides as the program guides implemented on set-top boxes 48 of FIG. 1. Certain program guide functions (particularly the display of graphics or videos) may involve the use of resources located at main facility 32 and television distribution facility 38 and other such facilities. If desired, some of the steps of FIG. 2 may be performed using an application running on set-top boxes 48 other than the interactive program guide. For clarity, the principles of the invention are described in the context of an arrangement in which the set-top-based steps of FIG. 2 are performed primarily using an interactive television program guide.

[0062] FIGS. 3, 4a, 4b, 4c, 5, and 6 show various illustrative topologies for configuring multiple program guides within a household.

[0063] FIG. 3 shows an illustrative arrangement for interconnecting various user television equipment devices in accordance with the present invention. Primary user television equipment 60 may be connected to secondary user television equipment 61, secondary user television equipment 62, and secondary user television equipment 63 via communication paths 64. Communications paths 64 may be any suitable communications path for in-home network, such as twisted pair lines, Ethernet links, fiber optics, power lines, radio-frequency (RF) links, infrared (IR) and links other wireless links, firewire (IEEE 1394) paths, dedicated cables, etc. As shown, one or more pieces of secondary user television equipment may be connected to primary user television equipment 60 in a star configuration if desired. User television equipment devices are typically located in different rooms within home 65. For example, primary user television equipment 60 may be placed in the parents' bedroom, secondary user television equipment 61 may be placed in the children's room, secondary user television equipment 62 may be placed in a living room, and secondary user television equipment 63 may be placed in a guest room. With such an arrangement, the parents' bedroom may be used as a master location to adjust user settings for the program guides on the user television equipment in the children's room and the other rooms.

[0064] FIG. 4a shows an illustrative tree configuration in which each piece of user television equipment is interconnected with another along a single path. User television equipment 66, 67, 68, and 69 of FIG. 4 are connected to each of the others via communications paths 70. Communications paths 70 may be any suitable communications path for in-home network, such as twisted pair lines, Ethernet links, fiber optics, power lines, radio-frequency (RF) links, infrared (IR) and links other wireless links, firewire (IEEE 1394) paths, dedicated cables, etc. Two or more pieces of user television equipment may be connected in this way. The equipment mentioned above may be placed in various rooms within home 65. For example, user television equipment 66 may be placed in a parents' bedroom, user television equipment 67 may be placed in a children's room, user television equipment 68 may be placed in a living room, user television equipment 69 may be placed in a guest room. With the arrangement of FIG. 4a, each piece of user television equipment in home 65 may communicate with each other piece of user television equipment in home 65 over communications paths 70. FIG. 4a shows the system connected in a tree topology. If desired, this level of interconnectivity may be achieved using communications paths that are arranged in a ring configuration (FIG. 4b), bus configuration (FIG. 4c) or other suitable topology. Any of these topologies may use the types of communications paths described in connection with the arrangement of FIG. 4a.

[0065] FIG. 5 shows an illustrative configuration based on a client-server architecture. Server 80 may be

connected to user television equipment 81, 82, and 83 via communication paths 85. Equipment 81, 82, and 83 and server 80 may be placed in various rooms within home 65. For example, server 80 may be placed in a den, user television equipment 81 may be placed in a children's room, user television equipment may be placed in a living room, user television equipment 83 may be placed in a parents' room. Communication paths 85 may be any in-home network suitable to transmit video, audio and data, such as dedicated cable fiber optics, firewire links, RF links, etc. As, in the examples of FIGS. 4a, 4b, and 4c, different communications path arrangements such as buses, rings and the like, may be used to interconnect user television equipment based on a client-server architecture.

[0066] FIG. 6 shows an illustrative configuration based on a single set-top box. Set-top box 90 is connected to optional videocassette recorders 91 and televisions 94, 96, and 98 via communication paths 99. Optional videocassette recorder 91 is in turn connected to televisions 92. If desired, any combination of televisions with or without videocassette recorders and televisions may be connected in a similar manner. The set-top box, videocassette recorders and televisions of FIG. 6 may be placed in rooms within home 65. For example, set top box 90, videocassette recorder 91 and television 92 may be placed in a parent's bedroom, television 94 may be placed in a children's room, and television 96 may be placed in a living room, and television 98 may be placed in a guest room. Communication paths 99 may be any in-home network paths suitable for transmitting video, audio and data, such as, dedicated cable, fiber optics or firewire links.

[0067] FIGS. 7a, 7b, 7c, 8, and 9 show illustrative configurations for the connection between the home and the television distribution facility. Only one user television equipment device is shown in the households in FIGS 7a, 7b, 7c, 8, and 9 to avoid over-complicating the drawings. However, each household 65, 101, 102, 103, 104, 301, 302 in FIGS. 7a, 7b, 7c, 8, and 9 may contain multiple pieces of user television equipment configured as shown in FIGS. 3, 4a, 4b, 4c, 5, or 6.

[0068] FIG. 7a shows an illustrative configuration in which multiple homes are handled by a common server. Server 105 may be located at central facility 100. Central facility 100 may be a private home, a commercial building, a network node, or other suitable structure that may be connected to a plurality of homes. In the example of FIG. 7a, server 105 is connected to user television equipment 106, 107, 108, and 109 that is located in homes 101, 102, 103, and 104, respectively via communication paths 700. When multiple user television equipment devices exist within a home as shown by devices 109a and 109b, each user television equipment device may communicate with the server 105 independently via communication paths 700, alternatively only one device may communicate while the other communicates via a home network. In other words, in alterna-

tive arrangements, there are either 1) multiple connections to an outside server and each user television equipment device communicates with the server independently with no need for an in-home network, or, 2) only one connection to an outside server and each user television device communicates with each other through an in-home network.

[0069] As shown in FIG. 7b, the capabilities of server 42 (FIG. 1) may be provided using servers 56 located at network nodes 58. Servers such as servers 56 may be used instead of server 42 or may be used in conjunction with a server 42 located at television distribution facility 38.

[0070] Graphics information for messages, advertisements and the like may be downloaded periodically (e.g., once per day) to set-top boxes 48 of FIG. 1 and stored locally. The graphics information may be accessed locally when needed by the program guides implemented on set-top boxes 48. Graphics information may also be provided in a continuously-looped arrangement on one or more digital channels on paths 46. With such a continuously-looped arrangement, a map indicating the location of the latest graphics information may be downloaded periodically to set-top boxes 48 (e.g., once per day) or continuously. This allows the content on the digital channels to be updated. The program guides on set-top boxes 48 may use the map to locate desired graphics information on the digital channels. Another approach involves using a server such as server 42 or

30 servers 56 (FIG. 7b) to provide the graphics information after a set-top box 48 and that server have negotiated to set up a download operation. A bitmap or other suitable set of graphics information may then be downloaded from the server to the set-top box. If desired, the server may download instructions informing the set-top box where the desired graphics information can be located on a particular digital channel. The graphics information can be updated periodically if the server that is responsible for downloading the instructions for informing the set-top box of the location of the graphics information is also updated periodically.

[0071] Text information for messages, advertisements and the like may be provided to set-top boxes 48 using the same paths that are used for distributing program guide data. For example, advertising data from database 36 of FIG. 1 may be provided to set-top boxes 48 using link 40, television distribution facility 38, and paths 46. The text information may be stored locally in set-top boxes 48 and updated periodically (e.g., once per day).

[0072] Text information, graphics information, and videos for messages, advertisements and the like may also be distributed using a combination of these techniques or any other suitable technique.

[0073] As shown in FIG. 7c, when a household has more than one home, the user television equipment in each home may be connected by modem link or other suitable link for transferring data between homes. For

example, user television equipment 403 may be connected to user television equipment 404 via link 405. Link 405 may use internal or external modems, cable modems or other communications devices suitable for transmitting audio, video, and text data. In this manner, home 401 and home 402 may share program guide settings.

[0074] As shown in FIG. 7d, when a household has more than one home, the user television equipment in each home may be connected via an outside server. For example, user television equipment 413 may be connected to user television equipment 414 via server 410. Communication paths 415 may use internal or external modems, cable modems or other communications devices suitable for transmitting audio, video, and text data. In this manner, home 411 and home 412 may share program guide settings.

[0075] FIG. 8 shows an illustrative configuration in which a server is connected to the home via the Internet. Set top boxes 122 are connected to the Internet 110 or other suitable data network in real time using real-time communications devices 121. Videocassette recorders 123 may be connected between set-top boxes 122 and televisions 124. Real-time communications devices 121 may be any devices suitable for maintaining a constant open connection with network 110, such as internal or external modems, cable modem, or the like. The network used to connect homes to television distribution facility 38 may be any network suitable for distributing video and audio data such as the Internet. Network 110 is connected to television distribution facility 38 by communications link 115 and is connected to real-time communications device 121 by communications links 120.

[0076] FIG. 9 shows an illustrative configuration in which user television equipment is linked to a server outside the home via an occasional return path. Set top box 132 is connected to occasional return path communications device 130 and videocassette recorder 134. Videocassette recorder 134 may be connected to television 136. Occasional return path communications device 130 may be any device suitable for connecting set-top box 132 to a server for the transfer of video and audio data, such as an internal or external modem, cable modem, or the like. Occasional return path communications device 130 server 42 which may or may not be connected to television distribution facility 38 using a communications path 131. Communications path 131 may be, for example, a telephone link or other nondedicated communications path suitable for providing an occasional return path to home 65 from server 42.

[0077] FIG. 10 shows illustrative components for user television equipment 44 (FIG. 1). In the arrangement of FIG. 10, set top box 48 is connected to data input device 140. Data input device 140 may be a keyboard, keypad, or any device suitable for inputting text (wired or wireless), audio or video. Videocassette recorder 50 is connected to set-top box 48 and television 52. Remote control 54 is used to control the operation of set-top box 48,

videocassette recorder 50, and television 52.

[0078] Further aspects of the invention are described in detail below. For clarity, the principles of the invention described below are described in the context of the device configuration shown in FIG. 3 and the steps illustrated of FIG. 2, except where noted. However, the principles of the present invention also apply to configurations such as those shown in FIGS. 4-9. Also, the foregoing description is merely illustrative of the principles of this invention and various modifications can be made by those skilled in the art without departing from the scope and spirit of the invention.

[0079] In any of the above arrangements, an interactive television program guide on each user television equipment device may provide various features for displaying television program listings information for the user and for providing various program guide functions such as parental control, favorites, pay-per-view purchasing, etc. For example, if the user presses the appropriate buttons on remote control 54, the user may be presented with a time-ordered or channel-ordered grid or table of television program listings or other such programming information.

[0080] With one suitable approach, the user may select one of the user television equipment devices to be a master or primary device. Adjusting the program guide settings of the master device controls these settings for all other devices in the household. For example, with the arrangement of FIG. 3, the user may set primary user television equipment 60 to be the master device. Primary user television equipment 60 may be located in the parents' bedroom. This allows the head of the household to control the program guide settings for all of the program guides in the household from a single location.

[0081] The system may provide the user with an opportunity to assign a master device, such as user television equipment 60, that will coordinate its program guide settings with other devices such as secondary user television equipment 61, 62, and 63. The system also provides the user with an opportunity to assign secondary devices.

[0082] One suitable way in which the system may allow the user to assign devices as primary (master) and secondaries is for at least one of the program guides (e.g., the program guide running on set-top box 60) to provide an assign locations screen such as assign locations screen 160 of FIG. 11. Screen 160 may be accessed, for example, by first accessing main screen 170 of FIG. 12 (by pressing, e.g., a suitable key on remote control 54). After accessing screen 170, the user can use remote control 54 to move highlight region 177 to the setup option 179 and select setup option 179 by pressing a select key, enter key, "OK" key, or other such key (sometimes referred to herein as simply an enter key) on remote control 54.

[0083] Selecting setup option 179 directs the program guide to display a setup screen such as setup screen 310 of FIG. 31. The user can select assign location op-

tion 316 on setup screen 310 by moving highlight region 312 and pressing the enter key. Selecting assign location option 316 directs the program guide to display assign locations screen 160 of FIG. 11. The user can then move highlight region 162 to set B option 165. Selecting option 165, directs the program guide to provide the user with an opportunity to enter a name to assign to set B. For example, the user may use data input device 140 or remote control 54 to enter the letters associated with the selected name. The program guide may use such user-defined device names when the relationship between devices is set up. For example, the user may designate the "parents room" location as a master location and may designate the "children's room" location as a slave location. The names of locations may be pre-set by a service provider and simply assigned by the user. Alternately the user (or an installation technician), may have the ability to assign locations from the home. The location name may be chosen from a list as above or typed in by the user (or an installation technician.)

[0084] In the alternative arrangement shown in FIG. 4, each piece of user television equipment 66, 67, 68, and 69 is a peer. The user can assign names to each such user television equipment device in much the same way that names may be assigned to the secondary devices in the FIG. 3 arrangement.

[0085] As shown in FIG. 14, at step 1000, the program guide may provide the user with an opportunity to select the devices or locations for which the user desires to adjust settings. Step 1000 may, for example, involve providing a screen such as select location screen 400 of FIG. 13. At step 1001 of FIG. 14, after the user has made a selection by moving highlight region 155 (FIG. 14) to the desired device (e.g., parents' room option 154) and pressed the enter key, the program guide sets the selected locations. The guide may also default to a particular location based on the type of setting that is changed. (e.g., if a setting for the recording of a program is changed, the guide may default to location with a videocassette recorder.) The guide may default to any combination of locations based on the type of setting that is changed. There are also "other factors" that may be used by the guide to determine at which location the settings will be effective. These include: the current location of the user making the adjustment, whether a location to be adjusted is currently being used, the state of other settings, etc..

[0086] The program guide may allow a unique number to be assigned to a user so that he or she is able to access his or her program guide settings at a location outside the home. For example, a user may visit a neighbors home to housesit while the neighbor is out of town. This user has the ability to log on to the program guide at the neighbors home and access his or her personal program guide settings.

[0087] The program guide may allow the user to set parental controls to prevent children from viewing potentially inappropriate material. At step 1010 of FIG. 17,

for example, the program guide may provide the user with an opportunity to access main screen 170 of FIG. 12. On Main screen 170, the user may use remote control 54 to move highlight region 177 to the parental control option 176 and select that option by pressing the enter key.

[0088] At step 1011 of FIG. 17, after the user has entered a preselected password 211 (FIG. 15) on enter password screen 210 of FIG. 15, the program guide checks the password. If the wrong password was provided then the user is shown invalid password screen 212 of FIG. 15 at step 1014 of FIG. 17, and may be returned to main menu screen 170 of FIG. 12. If the user has provided a valid password the program guide provides various options at step 1015. At step 1015, the user can access parental control screen 190 of FIG. 16 and may use remote control 54 to navigate between options such as set channels option 191, set maximum rating option 193, and monitor viewing option 195. The user may navigate to set channels screen 200 of FIG. 18a by selecting set channels option 191 at step 1016 of FIG. 17 by moving the highlight region 192 and pressing select.

[0089] If the user selects set channels option 191 at step 1016, at step 1020 the program guide provides the user with an opportunity to set which channels are to be blocked. The user may block specific channels using remote control 54 to scroll through and select from channel options 201, 202, 203, and 204 of FIG. 18a. For example, the user may move highlight region 207 to channel option 201 (which may be an adult channel). The user can then toggle between blocking and not blocking the channel by pressing the enter key on remote control 54.

[0090] In screen 200 of FIG. 18a, a blocked channel is represented by an X. The user can choose to apply the parental controls selected in screen 200 of FIG. 18a to all locations by selecting apply to all option 205, choose to apply to the current location by selecting current location option 209, or can choose to apply the controls to a specific location or locations by selecting the select locations option 206 from the option provided by the program guide, at step 1024 of FIG. 17. The guide may apply the settings to a default location or to a location determined by other factors as described above.

[0091] FIG. 18b shows an illustrative parental controls set channels screen 208 that may be used when it is desired to hide controlled channels rather than merely blocking them. When the user chooses to hide the channels, the blocked channels do not appear on any of the program listings display screens provided by the program guide.

[0092] The user may also navigate to a set maximum ratings screen by choosing set maximum rating option 193 of FIG. 16, at step 1017 of FIG. 17, by moving a highlight region and pressing select. The user may then set a maximum rating allowed for viewing in a manner similar to the set channels option. For example, the user

tion 316 on setup screen 310 by moving highlight region 312 and pressing the enter key. Selecting assign location option 316 directs the program guide to display assign locations screen 160 of FIG. 11. The user can then move highlight region 162 to set B option 165. Selecting option 165, directs the program guide to provide the user with an opportunity to enter a name to assign to set B. For example, the user may use data input device 140 or remote control 54 to enter the letters associated with the selected name. The program guide may use such user-defined device names when the relationship between devices is set up. For example, the user may designate the "parents room" location as a master location and may designate the "children's room" location as a slave location. The names of locations may be pre-set by a service provider and simply assigned by the user. Alternately the user (or an installation technician), may have the ability to assign locations from the home. The location name may be chosen from a list as above or typed in by the user (or an installation technician.)

[0084] In the alternative arrangement shown in FIG. 4, each piece of user television equipment 66, 67, 68, and 69 is a peer. The user can assign names to each such user television equipment device in much the same way that names may be assigned to the secondary devices in the FIG. 3 arrangement.

[0085] As shown in FIG. 14, at step 1000, the program guide may provide the user with an opportunity to select the devices or locations for which the user desires to adjust settings. Step 1000 may, for example, involve providing a screen such as select location screen 400 of FIG. 13. At step 1001 of FIG. 14, after the user has made a selection by moving highlight region 155 (FIG. 14) to the desired device (e.g., parents' room option 154) and pressed the enter key, the program guide sets the selected locations. The guide may also default to a particular location based on the type of setting that is changed. (e.g., if a setting for the recording of a program is changed, the guide may default to location with a videocassette recorder.) The guide may default to any combination of locations based on the type of setting that is changed. There are also "other factors" that may be used by the guide to determine at which location the settings will be effective. These include: the current location of the user making the adjustment, whether a location to be adjusted is currently being used, the state of other settings, etc..

[0086] The program guide may allow a unique number to be assigned to a user so that he or she is able to access his or her program guide settings at a location outside the home. For example, a user may visit a neighbors home to housesit while the neighbor is out of town. This user has the ability to log on to the program guide at the neighbors home and access his or her personal program guide settings.

[0087] The program guide may allow the user to set parental controls to prevent children from viewing potentially inappropriate material. At step 1010 of FIG. 17,

for example, the program guide may provide the user with an opportunity to access main screen 170 of FIG. 12. On Main screen 170, the user may use remote control 54 to move highlight region 177 to the parental control option 176 and select that option by pressing the enter key.

[0088] At step 1011 of FIG. 17, after the user has entered a preselected password 211 (FIG. 15) on enter password screen 210 of FIG. 15, the program guide 10 checks the password. If the wrong password was provided then the user is shown invalid password screen 212 of FIG. 15 at step 1014 of FIG. 17, and may be returned to main menu screen 170 of FIG. 12. If the user has provided a valid password the program guide provides various options at step 1015. At step 1015, the user can access parental control screen 190 of FIG. 16 and may use remote control 54 to navigate between options such as set channels option 191, set maximum rating option 193, and monitor viewing option 195. The user 20 may navigate to set channels screen 200 of FIG. 18a by selecting set channels option 191 at step 1016 of FIG. 17 by moving the highlight region 192 and pressing select.

[0089] If the user selects set channels option 191 at 25 step 1016, at step 1020 the program guide provides the user with an opportunity to set which channels are to be blocked. The user may block specific channels using remote control 54 to scroll through and select from channel options 201, 202, 203, and 204 of FIG. 18a. For example, the user may move highlight region 207 to channel option 201 (which may be an adult channel). The user can then toggle between blocking and not blocking the channel by pressing the enter key on remote control 54.

[0090] In screen 200 of FIG. 18a, a blocked channel is represented by an X. The user can choose to apply the parental controls selected in screen 200 of FIG. 18a to all locations by selecting apply to all option 205, choose to apply to the current location by selecting current location option 209, or can choose to apply the controls to a specific location or locations by selecting the select locations option 206 from the option provided by the program guide, at step 1024 of FIG. 17. The guide 40 may apply the settings to a default location or to a location determined by other factors as described above.

[0091] FIG. 18b shows an illustrative parental controls set channels screen 208 that may be used when it is desired to hide controlled channels rather than merely blocking them. When the user chooses to hide the channels, the blocked channels do not appear on any of the program listings display screens provided by the program guide.

[0092] The user may also navigate to a set maximum ratings screen by choosing set maximum rating option 193 of FIG. 16, at step 1017 of FIG. 17, by moving a highlight region and pressing select. The user may then set a maximum rating allowed for viewing in a manner similar to the set channels option. For example, the user

er's location communicates with the program guides at the user-selected locations. During this communication process, the program guide at the user's location directs the other program guides to set reminders for display at their locations just before the scheduled broadcast time of the program. If desired, the program guide at the user's location can communicate with the program guides at the selected locations using other suitable techniques. For example, the program guide at the user's location may issue instructions to the program guides at the selected locations just before the scheduled broadcast time of the program for which the reminder was set that causes those program guides to display a reminder message at that time. These approaches are merely illustrative. Any other suitable approach for communicating the reminders settings or any other program guide settings from the program guide at the user's location to the other program guides may be used if desired.

[0102] A short time before the scheduled broadcast time of the program for which a reminder has been set, the program guide at each selected location may display a reminder display region 361 on the television screen 360 at that location (Step 1032; FIG. 23), as shown in FIG. 22. Reminder display region 361 may be displayed as a partial screen overlay over the currently displayed television channel (e.g., channel 9). In the example of FIG. 22, two reminders were set for the 10:00 AM time slot. As a result, reminder display region 361 contains program listings for both selected programs. A user at any of the program guide locations in which the reminder is displayed may automatically tune to one of the selected programs by moving highlight region 362 from hide reminders option 363 to program listing 364 or program listing 365. When the user at that location presses the select button, the set-top box 48 at that location tunes to the channel of the selected program (step 1033, FIG. 23). If the user selects hide reminders option 363, reminder display region 361 is hidden from view. Additionally, reminders may be set to automatically tune to a particular channel without accessing a reminder display region. For example, a parent would have the ability to insure that the children's television automatically tunes to an educational program by setting a reminder for that program.

[0103] In addition to the opportunity to set reminders, the user may be provided the opportunity to create profiles to customize the viewing experience. For example, if desired, the program guides may allow each user to establish a profile of settings and other criteria as described, for example, in commonly-assigned Ellis et al. U.S. patent application No. 09/034,934, filed March 4, 1998, which is hereby incorporated by reference herein in its entirety. With such an approach, users may establish profiles of preferences such as their favorite channels, preferred genres of programming (sports, comedy, etc.), favorite actors, desired or required ratings, etc. In accordance with the present invention, one of the program guides may provide the user with an opportunity

to apply this profile to all locations or to apply such settings to a specific program guide location or locations. The guide may apply the profile to a default location or to a location determined by other factors as described above.

5 [0104] The user may also be provided the opportunity to set favorite channels. The program guide at the user's location may display a menu such as the menu of main screen 170 of FIG. 12. The user may then use remote control 54 to navigate to the favorites option 175 using remote control 54 and pressing the enter button.

10 [0105] Once the user chooses favorites option 175, the program guide at the user's location may present the user with a favorite channels screen such as favorite channels screen 250 of FIG. 24. The user may move highlight region 207 to a channel such as channel option 251 of screen 250 (which may be a local news channel) and can then toggle between selecting and not selecting that channel by pressing the enter key on remote control

15 20 25 [0106] 205. In the example of FIG. 24, a favorite channel is represented by an X. Next, the user can choose to apply the selected favorites settings to various other program guide locations by selecting apply to all option 205, apply to select locations option 206, or apply to current location 209. If the user chooses the apply to select locations option 206, the program guide at the user's location provides the user with menu screens from which to select the desired locations to which the favorites settings are to be applied. The desired locations may be set by default or other factors as described above. A parent may want to prevent children from even seeing the titles of objectionable programming.

30 [0107] 35 40 [0108] 45 50 [0109] 55 [0106] The user may be provided with an opportunity to select programs for recording at a later time. For example, if the user presses an appropriate button (e.g., a "record" button) after having used a browse feature to navigate to a program listing for "Holiday Entertaining" as shown in FIG. 20, the program guide at the user's location may present the user with a set recording screen such as set recording screen 270 of FIG. 25. Set recording screen 270 allows the user to set a selected program 274 (Holiday Entertaining) for recording by the program guide by selecting yes option 272 with highlight region 271. If the user selects no option 273, set recording screen 270 is canceled.

[0107] If a household has only one videocassette recorder 50, there will only be one location that will make all recordings, regardless of which location the recordings are set from. If there are multiple videocassette recorders, the user may be presented with select location screen 400 of FIG. 13 after selecting the yes option 272, that provides the user with an opportunity to select the location that will make the recording. If desired multiple locations may be selected. The guide may choose which VCR is used based on which VCR is busy or based on other factors.

[0108] At the scheduled broadcast time of the program to be recorded, the program guide at each select-

ed location causes videocassette recorder 50 to begin recording. After the scheduled completion of the broadcast of the recorded program, each program guide causes its videocassette recorder 50 to stop recording. The guides may cause videocassette recorders 50 to stop and start recording by sending an IR signal to the videocassette recorders IR input or by, any other suitable method for transmitting a signal to a videocassette recorder.

[0109] A series recording option may also be provided that allows users to record program series. Series recording is described in the above-mentioned Knudson et al. U.S. patent application Serial No. 09/330,792, filed June 11, 1999 (Attorney Docket No. UV-56).

[0110] Another example of a program guide feature that benefits from coordination between multiple program guide devices in a household is pay-per-view ordering.

[0111] The user may be provided with an opportunity to order pay-per-view programming with a program guide display screen such as main screen 170 of FIG. 12. The user may use remote control 54 to select the pay-per-view by time option 181.

[0112] The user may select a program to order from a screen such as pay-per-view screen 290 of FIG. 26 using remote control 54 to navigate through program options. For example, the user may move highlight region 291 to program listing 292 (which may be for the movie "Volcano" scheduled to be aired at 10:00 PM). The user may then select the program by pressing the enter button on remote control 54. Pay-per-view ordering screens such as pay-per-view ordering screen 370 of FIG. 27 may be used to allow the user to view information on the channel 371 on which the program is scheduled to be broadcast, the rating 377, the price 378 (shown illustratively as involving a surcharge for availability at additional locations within the household), and various available broadcast times 373, 374, and 376. A cancel option 372 allows the user to cancel pay-per-view ordering. The user may select cancel option 372 or a given broadcast time 373, 374, or 376 by placing highlight region 375 on top of the desired option and pressing enter. The user may choose to make the selected program available to various locations within the household by selecting the select locations option 206. Alternatively, the guide may make the program available to a default location or to a location determined by other factors as described above.

[0113] The program guide system may support a messages option. Messages may be sent from the service provider at television distribution facility 38 (FIG. 1) and may relate, e.g., to billing matters, general concerns, service issues, etc. Messages may be sent to the main facility or other locations by the Internet or electronic messages or other suitable means. Messages may appear on the television screen of television 52 when received. The appearance may, for example, be in a text box at the bottom of the screen. The user may

be provided a list of messages that may be viewed and choose one to view. An indicator may also appear showing that unread messages exist. A messages receiving screen such as messages receiving screen 300 of FIG.

5 28 may be provided that allows, the user to navigate through a table relating various locations with various types of messaging. For example, the user may move highlight region 301 to the option relating to messages of the billing type for the children's room location. By hit-

10 ting the enter key the user may toggle between turning such messages on and off. If, in this example, messages are turned on, the children's room would receive billing messages. If messages are turned off, the children's room would not receive billing messages.

15 [0114] A user may have the ability to send text, audio, graphics or video messages between locations. On Messages sending screen 340 of FIG. 29, the user may use data input device 140 (FIG. 10) to type a text message in the message entry section 343. Alternately the

20 user may enter audio messages through, for example, using a microphone as a data input device or video with a camera device. The user can select which location to send the message to by moving highlight region 341 to location option 342 (which may be the children's room).

25 For example, a parent in the downstairs master bedroom may send a message telling the child in the upstairs bedroom to come down for dinner or to do their homework. If desired, Messages sending screen 340 of FIG. 29 may provide the user with an opportunity to select from pre-existing text messages. These pre-existing messages may have been previously stored by a user or pre-set by the manufacturer. Messages may be transmitted between program guides at different locations within the household using any suitable communications technique such as e-mail protocols or any method described in connection with the above discussion of various topologies.

30 [0115] The program guide system may also provide the user with an opportunity to set device control options. For example, the user may access main screen 170 of FIG. 12, and use remote control 54 to choose the setup option 179 by using the remote control 54 to scroll to the setup option 179 and pressing the enter button. The user can then select audio option 312 on setup

35 screen 310 of FIG. 31 by moving highlight region 313 and pressing the enter button. Next, on the setup audio screen 330 of FIG. 33, the user may move highlight region 332 to set volume option 332. The user may use remote control 54 to adjust the volume upwards or downwards. For example, parents may wish to turn

40 down the volume on the kids television. The user may choose to apply the adjustments made on screen 330 to all locations by selecting apply to all option 205, to the current location by selecting apply to current location option 209, or may choose to apply adjustments to a specific location or locations by selecting the select locations option 206. Alternatively, the guide may apply

45 the settings to a default location or to a location deter-

50

55

mined by other factors as described above.

[0116] Another program guide option that may be co-ordinated within the household is an option for selecting languages. From setup screen 310 of FIG. 31, the user may also select language option 311 by moving highlight region 313 and pressing the enter button. On setup language screen 320 of FIG. 32 or other such screen, the user may move highlight region 321 to set language option 322 (which may be German). The user may use remote control 54 to select the chosen language. The user may choose to apply the adjustments to all locations by selecting apply to all option 205, choose to apply adjustments to a specific location or locations by selecting the select locations option 206, or choose to apply to the current location by selecting current location option 209. Alternatively, the guide may apply the settings to a default location or to a location determined by other factors as described above. The selected language may be used by the program guide when displaying program guide screens that contain text or audio, as described in Ellis et al. U.S. patent application Serial No. 09/354,602, filed concurrently herewith (Attorney Docket No. UV-115), now published as WO-A-01 06788.

[0117] Data files may be used to transmit program guide settings. When a particular program guide retrieves program guide settings adjustments for the user, this data may be transmitted to the central facility or to another program guide via the return path in a two-way cable link, via modem link, or via any other suitable communications path. The settings may be stored at a server or on any one of the program guides in a household. For example, in the configuration of FIG. 3, program guide settings adjustments collected at secondary user television equipment 61, may be stored at primary user television equipment 60. Similarly, set top box 90 of FIG. 6 may store program guide settings for televisions 92, 94, 96, and 98. In the configuration of FIGS. 4a, 4b, and 4c, program guide settings adjustments collected at user television equipment 66 may be stored at any one of user television equipment devices 66, 67, 68, or 69. In the configuration of FIGS. 7a and 7b, program guide settings that are shared such as family reminders may be stored on any one of servers 56, server 105, or server 42. Program guide settings may be transmitted periodically or when a data transfer is requested by a particular piece of user television equipment or the central facility. Certain communications protocols may be particularly suitable for certain topologies of user television equipment devices. For example, if the user television equipment devices are arranged in a ring topology, a token ring communications protocol may be particularly suitable for certain topologies of user television equipment devices. For example, if the user television equipment devices are arranged in a ring topology, a token ring communications protocol may be used to interconnect the program guides. A bus protocol may be used for a bus topology, etc. An advantage of using an in home network is sharing of data among devices within

the home. For example, a listing may be stored on only one device, freeing space for other settings to be stored on other devices.

[0118] Messaging information may be transmitted to or from the central facility via the return path in a two-way cable link, via modem link, or via any other suitable communications path. The type of message may determine where the message is stored. Messages sent by the central facility may generally be stored at the central facility. Messages generated by a user may be stored at the user television equipment that stores the user's other program guide settings.

[0119] The discussion thus far has focused on implementing the invention with an interactive television program guide. The invention may also be applied to non-program-guide applications. These non-program-guide applications run on user television equipment such as a set-top box. For example, an Internet browser may be run on a set-top box connected to a television. Internet application settings can be coordinated among televisions and/or set-top boxes within a household in the same way that program guide settings are coordinated among program guides in the house.

[0120] One non-program-guide application that may be implemented in accordance with the present invention is an Internet browser. An Internet browser may have settings such as bookmarks, parental control settings, and general preferences that control how the browser functions. As shown in FIG. 34, a browser application screen 700, may have a bookmark option 705. After adding a bookmark, the system allows the bookmark and other settings to be effective on other locations in the household. For example, a user may select bookmark option 705 and add a bookmark (i.e., a record of the address of the current web site that can be used to access the site). Through a network, in accordance with the present invention, the application can make the bookmark effective on other locations in the household. Accordingly, the user can choose to apply settings adjustments to all locations by selecting an apply to all option or may opt to apply the adjustments to a specific location or locations by selecting a select locations option from the options provided by the program guide. The guide may apply the settings to a default location or to a location determined by other factors as described above.

[0121] Another application that may be implemented in accordance with the present invention is a shopping application. A shopping application may have settings such as a default shipping address, and credit card number. As shown in FIG. 35, a shopping application screen 730, has settings such as a shipping address 720, and credit card number 725. After adding a shipping and credit card information, the system allows the shipping address, credit card number and other settings to be effective on other locations in the household. For example, a user can add a shipping address. Through a network, in accordance with the present invention, the

application can make the shipping address effective on other locations in the household. Accordingly, the user can choose to apply settings adjustments to all locations by selecting an apply to all option or may opt to apply the adjustments to a specific location or locations by selecting a select locations option from the options provided by the program guide. The guide may apply the settings to a default location or to a location determined by other factors as described above.

[0122] Another non-program-guide application that may be implemented on user television equipment and coordinated with other such applications in accordance with the present invention is a stock ticker. A stock ticker may have settings such as settings indicating the top 10 stocks in which the user is interested. As shown in FIG. 36, a stock ticker settings screen 710 has a ticker symbol 712 and a top 10 stocks option 715. For example, a user may add a top stock. Then, through a network, in accordance with the present invention, the application can make the top 10 stock settings effective on other locations in the household. Accordingly, the user can choose to apply the adjustments to all locations by selecting an apply to all option or may opt to apply the adjustments to a specific location or locations by selecting a select locations option from the options provided by the program guide. The guide may apply the settings to a default location or to a location determined by other factors as described above.

[0123] A chat application may be implemented on user television equipment such as a set top box. Chat applications are services that allow users to exchange chat messages with other users in real time. A chat application may be implemented as a stand-alone chat application or as part of another application such as a program guide application. A user may adjust settings associated with a chat application such as the size of a chat window or whether to filter potentially offensive messages. Chat applications that may be implemented on user television equipment are described in McKissick et al. U.S. patent application Serial No. 09/356,270, filed concurrently herewith (Attorney Docket No. UV-101), which is now published as WO-A-00 13416. After the user adjusts chat settings, the user can choose to apply the chat settings adjustments to all locations by selecting an apply to all option or may opt to apply the adjustments to a specific location or locations by selecting a select locations option. Settings may be coordinated between the chat applications using options provided by the chat application. The chat application may apply the settings to a default location or to a location determined by other factors as described above.

[0124] If desired, the settings of an e-mail application running on different user television equipment devices in the household may be coordinated. When the user adjusts the e-mail settings associated with one user television equipment device, the system coordinates the operation of the other e-mail applications so that the adjusted e-mail settings may be used by the other e-mail

applications.

[0125] The foregoing is merely illustrative of the principles of this invention and various modifications can be made by those skilled in the art without departing from the invention.

Claims

1. A method for using an interactive television program guide system based on a plurality of user television equipment devices on which a plurality of interactive television program guides are implemented, wherein at least one of the television equipment devices comprises a recording device, the method comprising:
 - interconnecting the plurality of user television equipment devices by communications paths; providing an opportunity for a user to select a program for recording on a first interactive television program guide associated with a first user television equipment device; and recording the selected program on a recording device, wherein the recording device is associated with a second user television equipment device, and
 - wherein the second user television equipment device is in a location remote from the first user television equipment device.
 - The method of claim 1, wherein the recording device is a videocassette recorder.
 - The method of claim 1, wherein the recording device is a personal video recorder.
 - The method of claim 1, wherein the recording device is associated with a second interactive television program guide.
 - The method of claim 1, further comprising:
 - allowing a user to select from a plurality of recording devices, wherein each of the plurality of recording devices are associated with a plurality of user television equipment devices that are in a location remote to the first user television equipment device and recording the selected program on the selected recording device.
 - The method of claim 5, wherein at least one of the plurality of recording devices is associated with an interactive television program guide.
 - The method of claim 1, wherein one of the user

vision equipment devices comprises a set-top box and at least a television and other user television equipment devices comprise a television but not a set-top box.

8. The method of claim 1, wherein the selected program is recorded at a future time.

9. The method of claim 1, further comprising allowing a user to select a series of programs to record and recording the selected series.

10. An interactive television program guide system based on a plurality of user television equipment devices on which a plurality of interactive television program guides are implemented, wherein at least one of the television equipment devices comprises a recording device, wherein:

the plurality of user television equipment devices are interconnected by communications paths;

a first user television equipment device is configured to provide a user with an opportunity to select a program for recording on a first interactive television program guide associated with the first user television equipment device; and a second user television equipment device is configured to record the selected program on a recording device, wherein the recording device is associated with the second user television equipment device, and wherein the second user television equipment device is in a location remote from the first user television equipment device.

11. The system of claim 10, wherein the recording device is a videocassette recorder.

12. The system of claim 10, wherein the recording device is a personal video recorder.

13. The system of claim 10, wherein the recording device is associated with a second interactive television program guide.

14. The system of claim 10, wherein the first interactive television program guide is configured to:

allow a user to select from a plurality of recording devices, wherein each of the plurality of recording devices are associated with a plurality of user television equipment devices that are in a location remote to the first user television equipment device and record the selected program on the selected recording device.

15. The system of claim 14, wherein at least one of the plurality of recording devices is associated with an interactive television program guide.

5 16. The system of claim 10, wherein one of the user television equipment devices comprises a set-top box and at least a television and other user television equipment devices comprise a television but not a set-top box.

10 17. The system of claim 10, wherein the selected program is recorded at a future time.

15 18. The system of claim 10, wherein first interactive television program guide is configured to allow a user to select a series of programs to record and record the selected series.

20

25

30

35

40

45

50

55

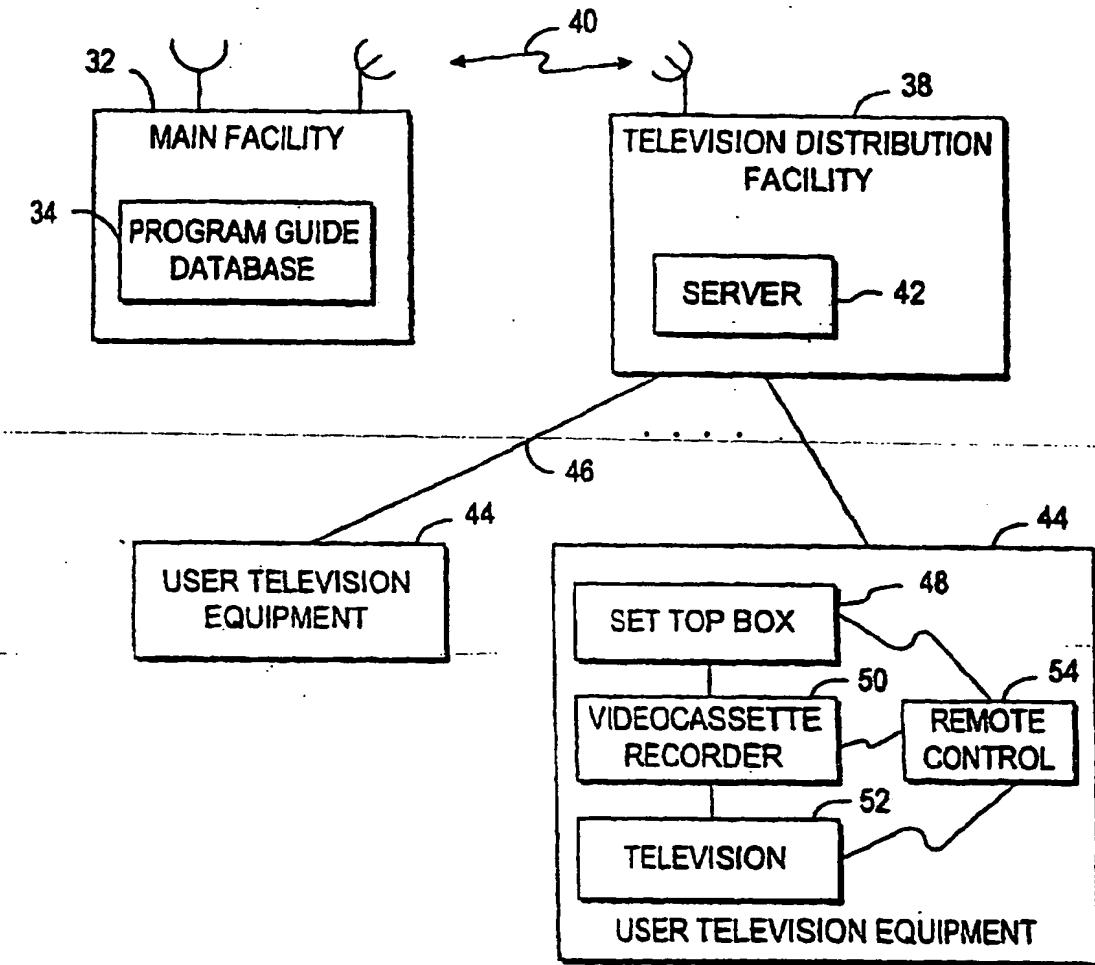
30

FIG. 1

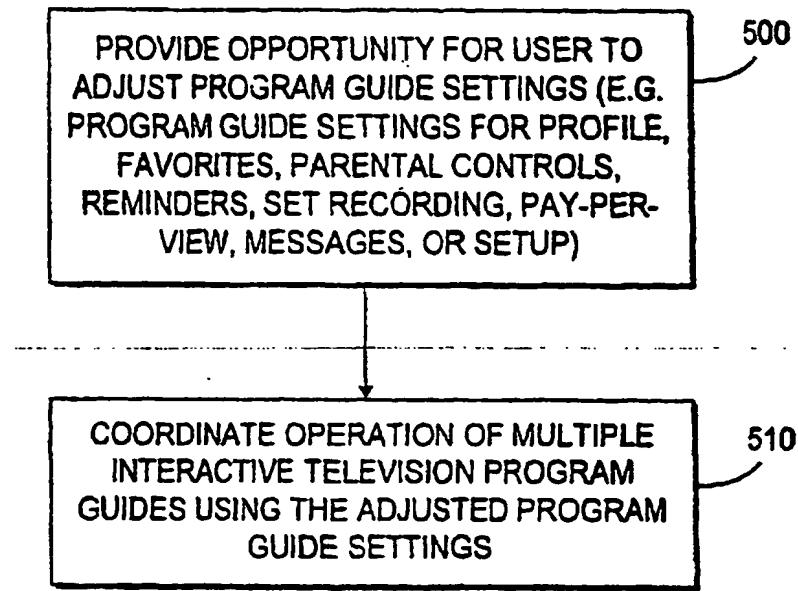


FIG. 2

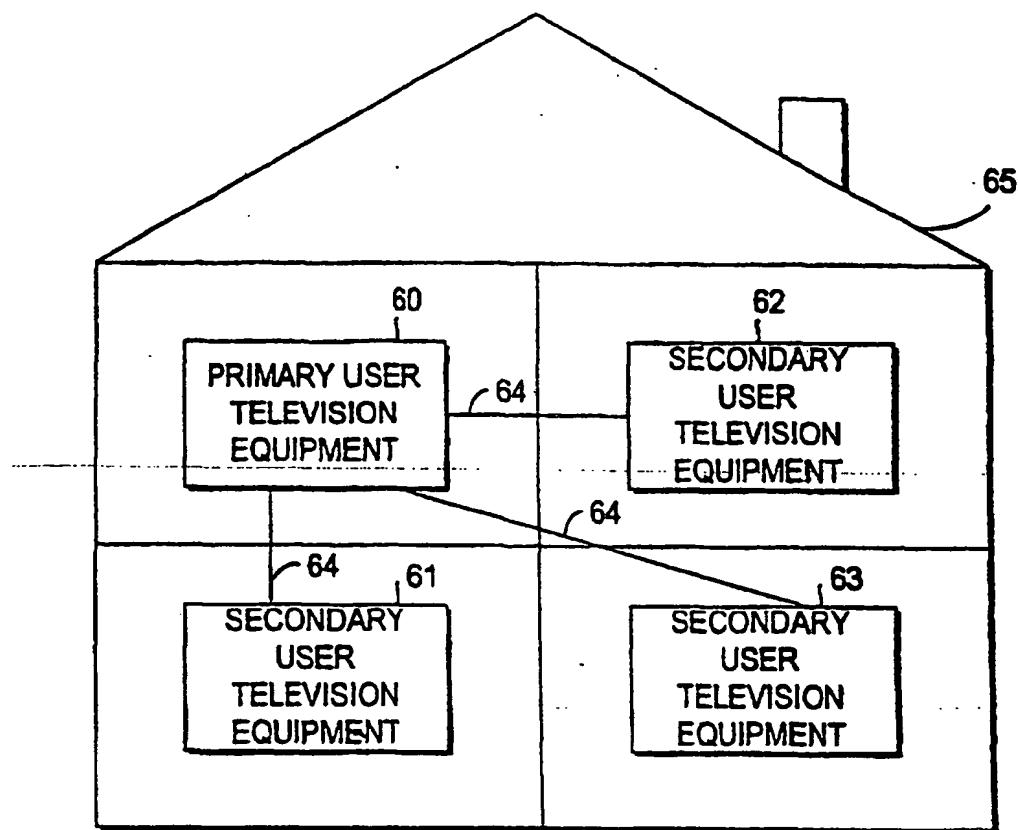


FIG. 3

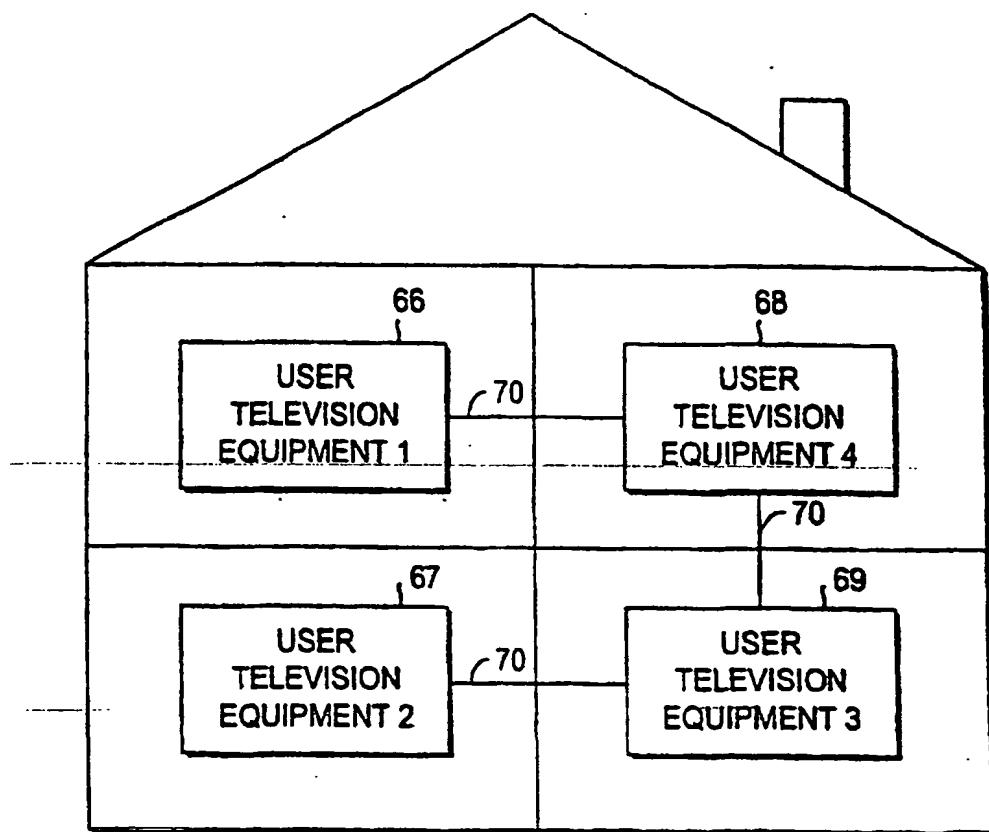


FIG. 4a

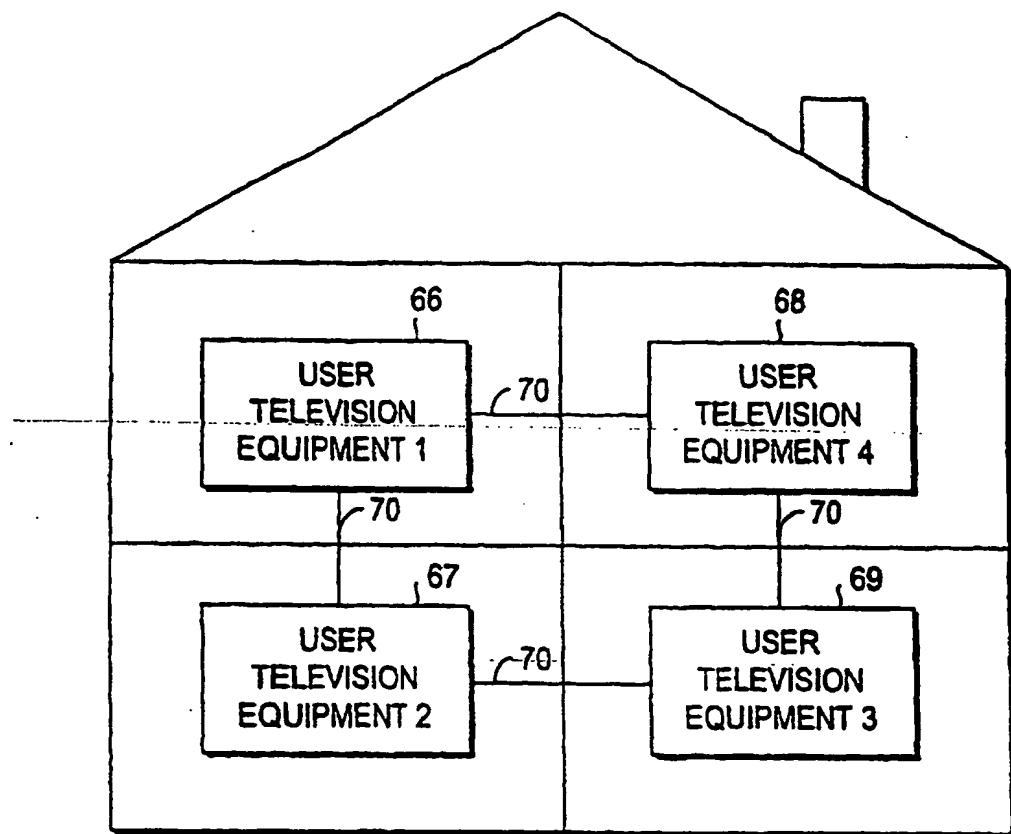


FIG. 4b

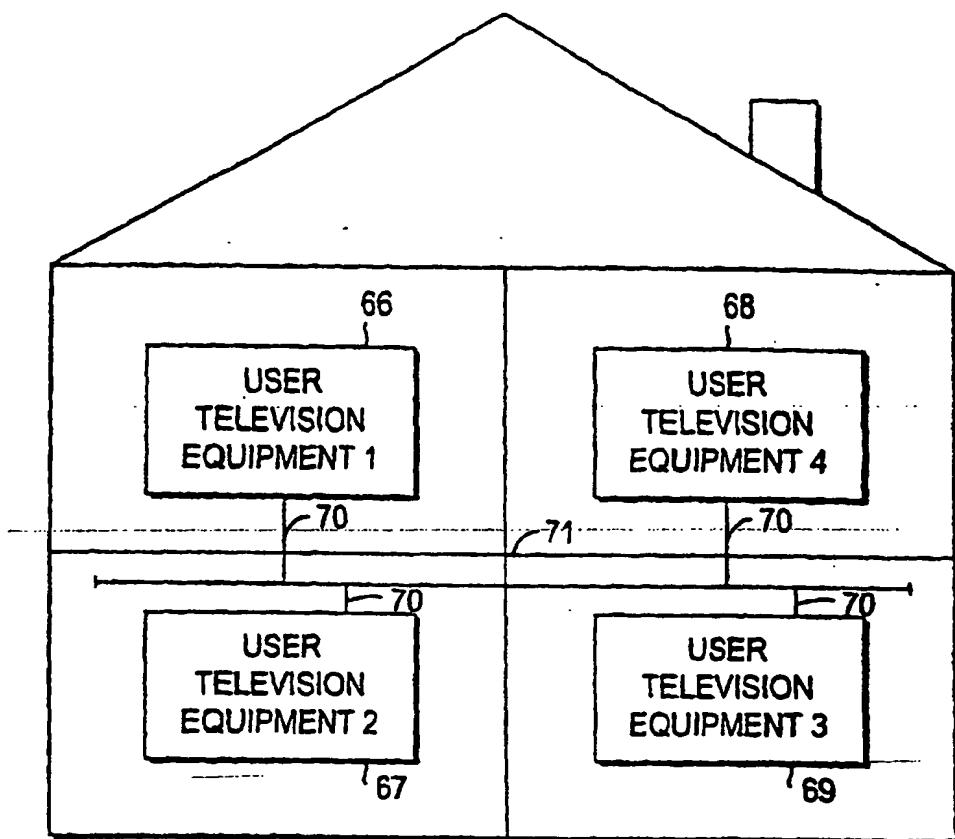


FIG. 4c

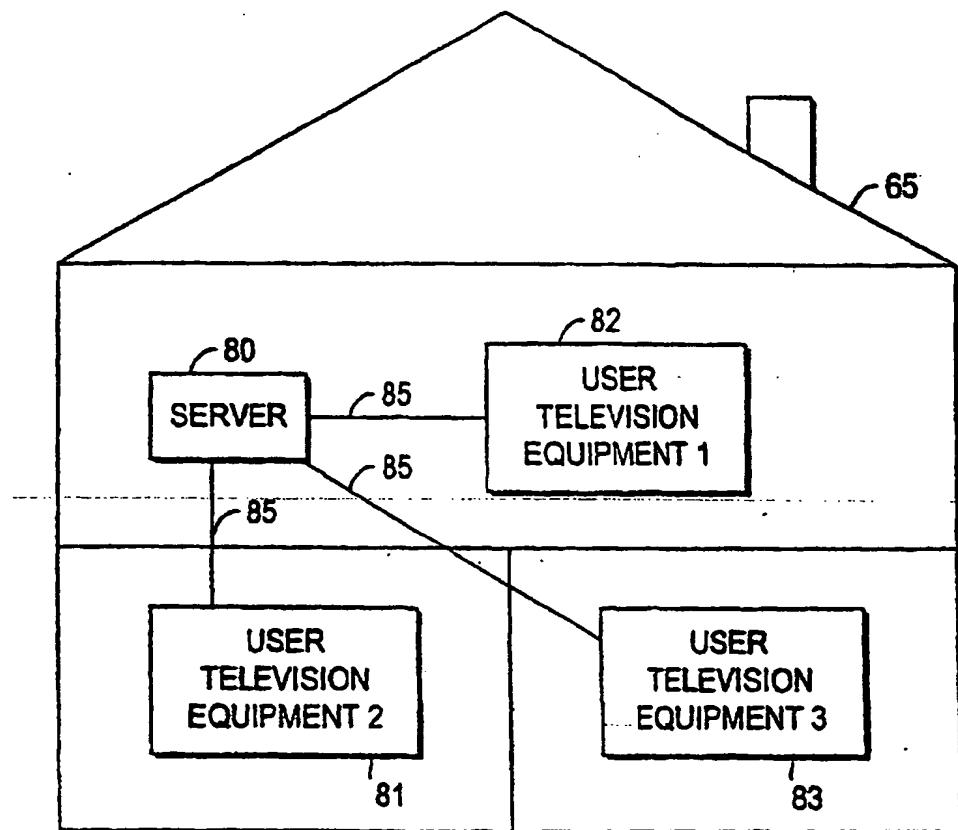


FIG. 5

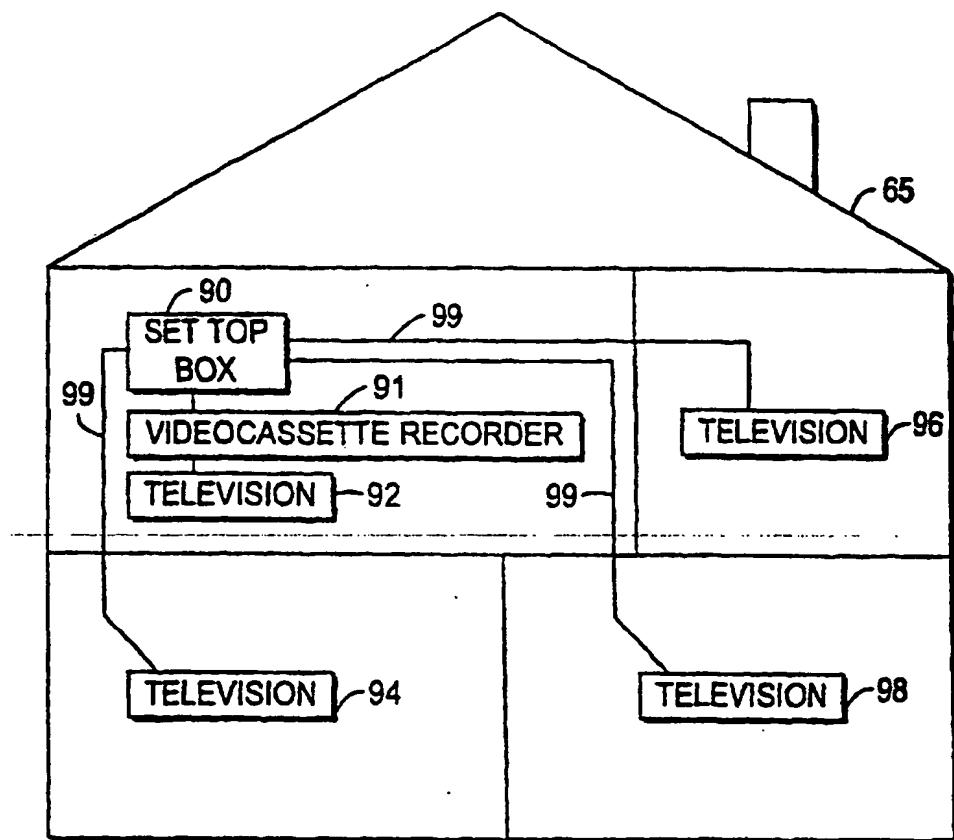


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.